





IPAN C11 - 4.5W - P-E12

Typical Applications

- Accent Lighting
- Architectural Lighting
- Mood Lighting

Features

- No UV or IR light radiation
- Long Life
- Mercury and lead free construction
- Illumination uniformity
- Operation temperature: $\sim 20^{\circ} - 45^{\circ}C$
- Current Controlled LED integrated driver inside
- Dimmable

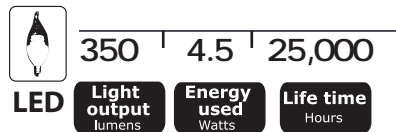

Electrical Parameter

Rated Wattage (W)	4.5(W)
Operating Voltage (V)	120
Operating Frequency (Hz)	60
Power Factor	0.9
View Beam Angle	35

Operation Date

Operating Temperature	$-20^{\circ}C \sim 45^{\circ}C$
Storage Temperature	$-20^{\circ}C \sim 45^{\circ}C$

Photometric Parameter

Colour Temperature (K)	2700K
Luminous Flux (lm)	350
Colour Rendering Index (Ra)	80
Rated Average Life (Hrs)	25,000 (Hrs)
Switch Times	200,000

Certification

